


Quick Open Closures

Seg-Band 2 Type

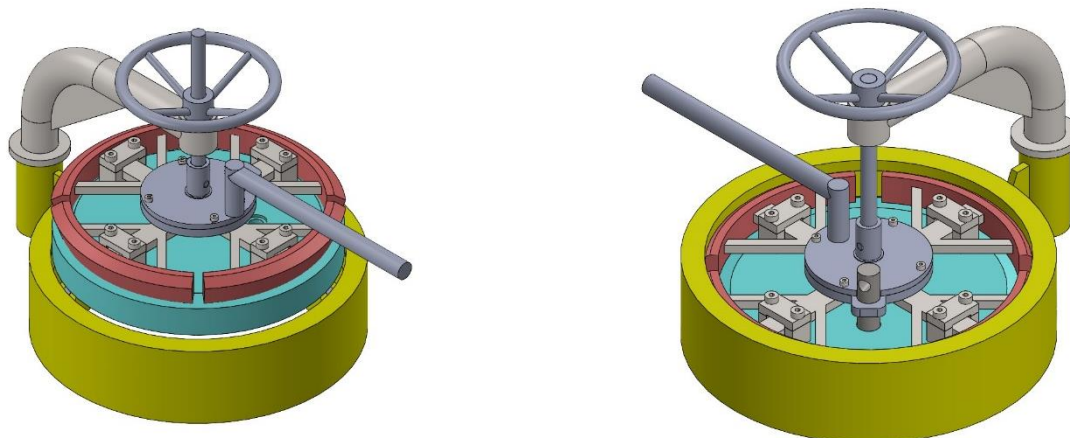

Salient Features

- Opens in minutes compared to conventional bolted flanged closures
- Requires no tools to operate & maintain
- Closures designed to meet ASME BPVC Section VIII Div. 1
- Finite element analysis software optimized design
- Sizes available from DN150 to DN1200
- Pressure ratings available from ASME Class 150 to Class 1500
- Fluid service compatible seal options
- Closures built with Code stamping as option
- Weld overlay on sealing surfaces as option
- Pressure warning bolt as per UG-35

Applications

- On process vessels like filters, separators, coalescers, strainers
- On pipeline equipment like pig launchers & receivers

Standard Materials of Construction

- SA 350 / SA 516 / SA 694 (Hub, Door, Ring)
- SA 182 / SA 240 (Hub, Door, Ring)
- Self-energizing seal (NBR / Viton)
- Other materials of construction on request
- NACE MR 0175 / TM 0824 compliant materials on request

Industries Used In

- Oil & Gas Production
- Petrochemical Mfg.
- Aviation
- Petroleum Refining
- Environmental
- Marine



Sungov Engineering Private Limited
K27 Ambattur Industrial Estate
Chennai 600058 Tamilnadu India
P +91 44 26359940 F +91 44 26501408
exportsales@sungov.com
www.sungov.com

Sungov Asia Pacific Private Limited
22 Malacca Street, #04-03
RB Capital Bldg. Singapore 048980
P +65 9739 5116
sales@sungov.sg
www.sungov.sg

Sungov Engineering (M) Sdn. Bhd.
Suite 1705A, Level 17, Menara Landmark
12 Jalan Ngee Heng, 80000 JB Malaysia
P: +60 16 7671912
sales@sungov.com.my
www.sungov.com.my